

Radio interference suppression filter, three-phase, for IT Network **HLD 810**



General Data

Rated voltage 3 x 520 Vac
Voltage range 0 - 3 x 520 Vac
Rated current 3 x 8 - 3 x 250 A
Ambient temperature max. 50 °C
Degree of protection IP 20
Leakage current 0 mA


Advantages

For enhanced requirements
Single-stage filter concept
Efficient filter effect against line-bound interference emissions
Increase in the interference immunity of the connected consumer

Applications

Radio interference suppression filter for line-side interference suppression of single devices, frequency converters or as group interference suppression.

Sample application

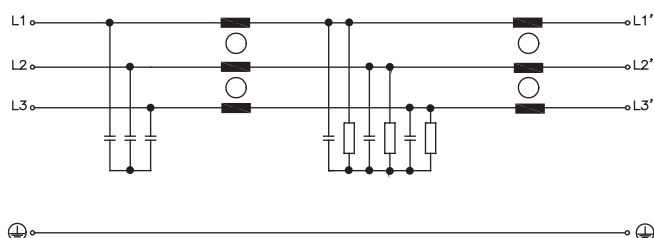

Standards

Radio interference suppression filter complying with
DIN EN 60939-2, UL 1283, CSA C22.2 No.8

Approvals



UL 1283 5th edition, CSA 22.2 No 8

3 Reactors / EMI filters

Three-phase radio interference suppression filters



Radio interference suppression filter, three-phase, for IT Network

HLD 810

Electrical data	Typ	HLD 810-500/8	HLD 810-500/12	HLD 810-500/16	HLD 810-500/30	HLD 810-500/42	HLD 810-500/55
	Operating data						
	Voltage range	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac
	Rated voltage	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac
	Rated current	3 x 8 A	3 x 12 A	3 x 16 A	3 x 30 A	3 x 42 A	3 x 55 A
	Rated frequency	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
	Power loss	6.0 W	9.0 W	12.0 W	15.0 W	22.0 W	30.0 W
	Oversrating Capacity	150 %, shortly	150 %, shortly	150 %, shortly	150 %, shortly	150 %, shortly	150 %, shortly
	Leakage current (50 Hz)	0 mA	0 mA	0 mA	0 mA	0 mA	0 mA
	Approvals	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8
	Environment						
	Climatic category	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]
	Ambient temperature max.	50 °C	50 °C	50 °C	50 °C	50 °C	50 °C
	Safety and protection						
	SCCR*	100 kA	100 kA	100 kA	100 kA	100 kA	100 kA
	Type	Metal enclosure	Metal enclosure	Metal enclosure	Metal enclosure	Metal enclosure	Metal enclosure
	Protection index	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
	Safety class (prepared)	I	I	I	I	I	I
	Test voltage	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE
	Notes						
	*	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse
	Order numbers						
	Order Number	HLD 810-500/8	HLD 810-500/12	HLD 810-500/16	HLD 810-500/30	HLD 810-500/42	HLD 810-500/55



Radio interference suppression filter, three-phase, for IT Network

HLD 810

Electrical data	Typ	HLD 810-500/75	HLD 810-500/100	HLD 810-500/130	HLD 810-500/180	HLD 810-500/250
	Operating data					
Voltage range		0 - 520 Vac	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac
Rated voltage		3 x 520 Vac	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac
Rated current		3 x 75 A	3 x 100 A	3 x 130 A	3 x 180 A	3 x 250 A
Rated frequency		50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Power loss		35.0 W	60.0 W	90.0 W	150.0 W	180.0 W
Oerrating Capacity		150 %, shortly	150 %, shortly	150 %, shortly	150 %, shortly	150 %, shortly
Leakage current (50 Hz)		0 mA	0 mA	0 mA	0 mA	0 mA
Approvals						
Approvals		cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8
Environment						
Climatic category		25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]
Ambient temperature max.		50 °C	50 °C	50 °C	50 °C	50 °C
Safety and protection						
SCCR*		100 kA	100 kA	100 kA	100 kA	100 kA
Type		Metal enclosure	Metal enclosure	Metal enclosure	Metal enclosure	Metal enclosure
Protection index		IP 20	IP 20	IP 20	IP 20	IP 20
Safety class (prepared)		I	I	I	I	I
Test voltage		2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE
Notes						
*		with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse
Order numbers						
Order Number		HLD 810-500/75	HLD 810-500/100	HLD 810-500/130	HLD 810-500/180	HLD 810-500/250



Radio interference suppression filter, three-phase, for IT Network **HLD 810**

Mechanical data	Typ	Terminals phase	Terminals PE	Fixing method	Fixing screws	Weight	Dimension picture (in mm)					
							Dimension picture (in mm)	A	B	C	D	E
	HLD 810-500/8	Screw clamp, 4 mm ²	Bolt, M5	Mounting lugs	M5	0.78 kg	1	190	45	75	20	180
	HLD 810-500/12	Screw clamp, 4 mm ²	Bolt, M5	Mounting lugs	M5	1.00 kg	1	220	45	75	20	210
	HLD 810-500/16	Screw clamp, 4 mm ²	Bolt, M5	Mounting lugs	M5	1.20 kg	1	250	45	75	20	240
	HLD 810-500/30	Screw clamp, 10 mm ²	Bolt, M5	Mounting lugs	M5	1.80 kg	1	270	55	95	30	255
	HLD 810-500/42	Screw clamp, 10 mm ²	Bolt, M6	Mounting lugs	M5	2.10 kg	1	310	55	95	30	295
	HLD 810-500/55	Screw clamp, 16 mm ²	Bolt, M6	Mounting lugs	M5	2.50 kg	2	250	85	95	60	235
	HLD 810-500/75	Screw clamp, 35 mm ²	Bolt, M8	Mounting lugs	M6	4.50 kg	2	270	85	135	60	255
	HLD 810-500/100	Screw clamp, 50 mm ²	Bolt, M10	Mounting lugs	M6	5.20 kg	2	270	95	150	65	255
	HLD 810-500/130	Screw clamp, 50 mm ²	Bolt, M10	Mounting lugs	M6	5.60 kg	2	270	95	150	65	255
	HLD 810-500/180	Screw clamp, 95 mm ²	Bolt, M10	Mounting lugs	M6	9.20 kg	2	380	130	181	102	365
	HLD 810-500/250	Screw clamp, 150 mm ²	Bolt, M12	Mounting lugs	M6	12.20 kg	2	450	155	220	125	435

Dimension pictures

