

Three-phase, primary switched mode power supply, Basic **PVSB 400**



General Data

Input rated voltage	3 x 400 - 500 Vac
Output rated voltage	24 Vdc
Output rated current	10 - 40 A
Ambient temperature	-25 °C to +70 °C
Efficiency	up to 94 %
Protection index	IP 20


Advantages

LCD
Output current and output voltage monitoring
RS-232 interface
Stabilised and adjustable output voltage
Up to 200 % Real Power Boost for 4 seconds
Top Boost to trip conventional circuit breakers
3 LEDs and active signal outputs to indicate operating status
Parallel connection option
Service-friendly spring-loaded connector system
Can be supplied with active inrush current limiting option
Panel installation on mounting rails

Applications

Primary switched mode power supply with high power reserves for all automation requirements with a variety of parameter setting and display functions, including output current and output voltage monitoring.

Sample application

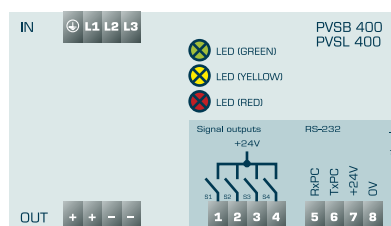

Standards

Primary switched mode power supply
to UL 60950, UL 508

Safety:
EN 61558-2-16, EN 60950-1

EMC:
EN 61204-3

Approvals



UL/CSA 60950 recognised (E213214), UL508 listed (E219022)



Three-phase, primary switched mode power supply, Basic **PVSB 400**

Electrical data	Typ	PVSB 400/24-10	PVSB 400/24-20	PVSB 400/24-40
	Input			
	Input rated voltage	3 x 400 - 500 Vac	3 x 400 - 500 Vac	3 x 400 - 500 Vac
	Input voltage range	340 - 550 Vac (480 - 780 Vdc)	340 - 550 Vac (480 - 780 Vdc)	340 - 550 Vac (480 - 780 Vdc)
	Input rated current (rated load)	0.6 A (3 x 340 Vac)	1.1 A (3 x 340 Vac)	2 A (3 x 340 Vac)
	Rated frequency range	44 Hz - 66 Hz / 0 Hz	44 Hz - 66 Hz / 0 Hz	44 Hz - 66 Hz / 0 Hz
	Starting current limiter	<30 A, NTC	<30 A, NTC	<30 A, NTC
	Input fuse internal	3 x 1.6 A (slow-blow)	3 x 2.5 A (slow-blow)	3 x 6.3 A (slow-blow)
	Recommended back-up fuse (circuit breaker)	6 A, 10 A, 16 A, characteristics B, C	6 A, 10 A, 16 A, characteristics B, C	10 A, 16 A, characteristics B, C
	Harmonic correction	passive	passive	passive
	Transient surge voltage protection	Varistor	Varistor	Varistor
	Mains buffering (rated load)	22.6 / 51.5 ms (400 / 500 Vac)	13.2 / 36.8 ms (400 / 500 Vac)	15.6 / 42.9 ms (400 / 500 Vac)
	Output			
	Output rated voltage	24 Vdc	24 Vdc	24 Vdc
	Output voltage range	22.8 - 28.8 Vdc	22.8 - 28.8 Vdc	22.8 - 28.8 Vdc
	Resistance to reverse feed max.	35 Vdc	35 Vdc	35 Vdc
	Output rated current	10.00 A	20.00 A	40.00 A
	Parallel connection	Yes	Yes	Yes
	Power Boost	20 A / 4 s (15 A / 8 s)	40 A / 4 s (30 A / 8 s)	60 A / 4 s (50 A / 8 s)
	Overload behaviour	Constant current or fuse	Constant current or fuse	Constant current or fuse
	Efficiency	typ. 91.7 %	typ. 92.9 %	typ. 93.1 %
	Ripple factor	typ. 70 mVss	typ. 70 mVss	typ. 70 mVss
	Top Boost	70 A / 50 ms	80 A / 50 ms	100 A / 50 ms
	Signaling			
	Power Good (DC OK)	LED green, LED red, LED yellow	LED green, LED red, LED yellow	LED green, LED red, LED yellow
	Potential free signal contact	No	No	No
	Active signal outputs	4 x 24 Vdc, 2 configurable	4 x 24 Vdc, 2 configurable	4 x 24 Vdc, 2 configurable
	Stand-by-input	No	No	No
	Display, interface	Yes, RS 232	Yes, RS 232	Yes, RS 232
	Approvals			
	Approvals	cURus, cULus	cURus, cULus	cURus, cULus
	Environment			
	Ambient temperature	-25° C to +70° C	-25° C to +70° C	-25° C to +55° C
	Storage temperature	-25 °C to +85 °C	-25 °C to +85 °C	-25 °C to +85 °C
	Derating	-3 %/K > +50 °C	-3 %/K > +50 °C	-5 %/K > +50 °C
	Safety and protection			
	Protection index	IP 20	IP 20	IP 20
	Safety class	I, with PE connection	I, with PE connection	I, with PE connection
	Accessory			
	Connector for signalling	PV-CON (optional)	PV-CON (optional)	PV-CON (optional)
	Adapter cable for interface	PV-KOK2 (optional)	PV-KOK2 (optional)	PV-KOK2 (optional)
	Side DIN rail mounting	PV-TS35M (optional)	PV-TS35M (optional)	PV-TS35M (optional)
	Direct screw fastening plate for lateral mounting	PV-WB2 (optional)	PV-WB2 (optional)	PV-WB2 (optional)
	Order numbers			
	Order Number	PVSB 400/24-10	PVSB 400/24-20	PVSB 400/24-40



Three-phase, primary switched mode
power supply, Basic

PVSB 400

Mechanical data	30		Type	Terminals input, (spring clamp terminal, pluggable)	Terminals output, (spring clamp terminal, pluggable)	Terminals signalling (spring clamp terminal, pluggable)	Mounting position	Fixing method	Weight	Dimension picture (in mm)	A	B	C	D	E	
				PVSB 400/24-10	max. 2.5 mm ²	max. 2.5 mm ²	max. 0.5 mm ²	vertical	DIN Rail system TS35	1.30 kg		57	179.5	127	76	12.5
				PVSB 400/24-20	max. 2.5 mm ²	max. 10 mm ²	max. 0.5 mm ²	vertical	DIN Rail system TS35	1.76 kg		77	179.5	127	76	12.5
				PVSB 400/24-40	max. 2.5 mm ²	max. 10 mm ²	max. 0.5 mm ²	vertical	DIN Rail system TS35	3.03 kg		128	205.5	127	76	12.5
				PVSB 400/24-80	max. 2.5 mm ²	max. 10 mm ²	max. 0.5 mm ²	vertical	DIN Rail system TS35	6.06 kg		158	205.5	127	76	12.5

Dimension pictures

